

Packaging - Specification Container for transport


SCHÜTZ

PE open top drum 30 ltr.
S-DS1 30l blue
A1/w/EPDM w.handle w/pin w/safety guard
Loading:8units,into PE-Bag

Schütz GmbH & Co. KGaA
Schützstrasse 12
D-56242 SELTERS / WESTERWALD

Article-No. **910643**

Date Aug 2, 2023
1 / 2

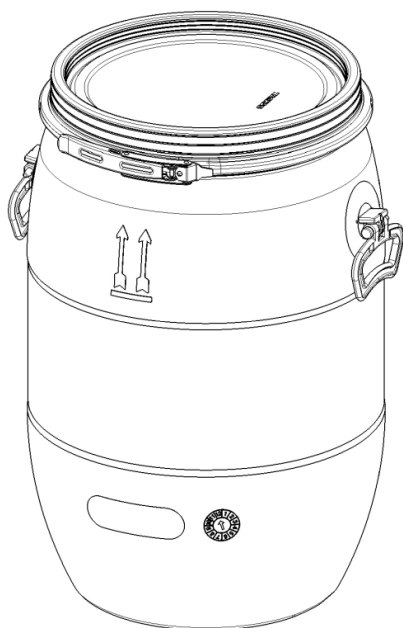

PLASTIC-OPEN HEAD DRUM (in accordance with DIN ISO 20848-1)	
Material drum body	PE-HD
Colour body	blue
Material drum lid	PE-HD
Colour lid	black
Gasket	EPDM-gasket
Tension ring	Steel, zincd
UN-Marking	UN_1H2/X60/S/...*/D/BAM_5202-SCHUETZ#

WEIGHTS AND MEASURES	
Drum height	520 mm
Drum height w/o lid	511 mm
Drum diameter	315 mm
Filling opening	250 mm
Nominal Capacity	30 Litres
Brimful Capacity min.	32 Litres
Weight body approx	1,46 kg
Weight total approx	2,1 kg

This picture is for illustration purpose only and does not necessarily correspond to the specified product.

Loading

- PE-cover
- palletized, 8 pieces

Features

- metal safety sheet

Heavy metals

Concentration level of heavy metals (Pb, Cd, Cr VI and Hg) in packaging does not exceed 100 ppm

Ventilation pin

Please remove the red pin before reclosing the lid!

Delivery

Ready for filling. The customer or filler is responsible for testing the material compatibility of the filling material with the packaging

This specification is manufactured and delivered in accordance with the current status of the SCHÜTZ "Quality Management Standard for Supplies of Packaging Materials", which you can view at the following link:
www.schuetz.net/qmstandard

PE drums are designed and constructed for the transport, storage and handling of filling products in accordance with the relevant dangerous goods regulations.

During the use of the drums, especially in the case of multiple refilling cycles, the attachment parts such as lids and plugs as well as the associated gaskets are subject to varying degrees of wear, depending on the filling

Packaging - Specification

Container for transport



PE open top drum 30 ltr.
S-DS1 30l blue
A1/w/EPDM w.handle w/pin w/safety guard
Loading:8units,into PE-Bag

Schütz GmbH & Co. KGaA
Schützstrasse 12
D-56242 SELTERS / WESTERWALD

Article-No. 910643

Date Aug 2, 2023
2 / 2

product, the type of application and the duration of use. The risk of wear increases with the frequency of use. In particular, washing procedures or improper handling during reconditioning can damage the drum or its attachment parts. After the initial opening, the drums should be emptied as soon as possible and with as few intervals as possible and should be securely closed after each emptying operation.

Where PE drums are used in multiple refill cycles, it is the responsibility of the filler and/or distributor to carry out the necessary quality checks in accordance with applicable regulations and to ensure that the packaging is in a proper condition. Damaged components must be professionally repaired or replaced with original Schütz components or other approved components.

General information about product descriptions, filling processes, storage and transport, resistance, type tests and handling can be found in our PE drum handling guide. All further information can be found in the corresponding documents, information brochures and declarations of conformity. You can obtain these either through our download portal on the website or on request from the Technical Customer Service at tcs@schuetz.net

PLEASE NOTE:

The information in this confirmation is based on our current knowledge and experience. They do not exempt users of our packaging systems from carrying out their own tests. This statement does not constitute a legally binding assurance. The customer is responsible for ensuring compliance with existing laws and regulations.