

Packaging - Specification container for transport


SCHÜTZ

220l S-DS1 Open Head Drum

Schütz GmbH & Co. KG aA
Schützstraße 12
D 56242 Selters / Germany

Date: 01.06.2018 / TE-KO / kl

Article - No.: 4010840

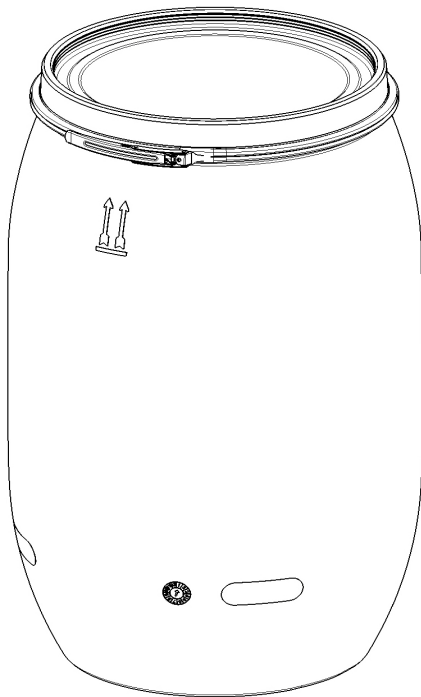

PLASTIC-OPEN HEAD DRUM (in accordance with DIN ISO 20848-1)	
Material Drum body	PE-HD
Colour body	blue
Material Drum lid	PE-HD
Colour lid	black
Gasket	EPDM
Tension ring	Steel, zincd
Fabrication	<u>Body:</u> flat and bulged coat, with two recessed grip opposite at the bottom <u>Lid:</u> compression border design, EPDM-gasket <u>Tension ring:</u> shaped slit strip with welded lever-closure, safety with locking pin, zinc coated
UN-Marking VPA 6	UN 1H2/X320/S/....*/D/ BAM11469-Schütz1 *year of production
Resistance against compression	20.000 N
Testing and description acc.	VPA 2, 3, 6 and 8

Dimensions (mm)	
Drum height	978,0 ±5
Drum height w/o lid	966,0 ±5
Drum Ø	590,0 ±4
Filling opening	474,0
Nominal capacity	220,0 ltr
Brimful capacity min.	228,0 ltr
Weight body	7,5 ±0,2 kg
Weight total	9,5 ±0,3 kg

Note: with ventilating pin in the tight zone between drum body bordure and gasket

220l S-DS1 Open Head Drum

Schütz GmbH & Co. KG aA
Schützstraße 12
D 56242 Selters / Germany

Article - No.: 4010840

Date: 01.06.2018 / TE-KO / kl

User information:

By implementing and continually improving extensive preventive programmes, SCHÜTZ strives towards minimising the potential contamination risk for filling material in line with the current state of the art and in accordance with recognised and applicable quality and System Standards.

In industrial manufacturing, however, the possibility of particles arising cannot be fundamentally and entirely eliminated. Specifically for plastic and Steel packaging, unavoidable friction during opening and closing as well as static charging of the packaging contribute to the development of particles and/or the possibility of particles being attracted. Such particles can then also invariably penetrate the packaging interior.

With the goal of minimising the risk of particle formation and transmission into packaging, users are recommended - particularly during further processing - to keep packaging closed wherever possible and to keep the number of opening and closing procedures as low as possible.

In the case of sensitive filling materials or filling material applications (e.g. for food/pharmaceutical products, paint or electro-chemicals), it is also recommended that the filling material is filtered on removal or prior to further processing.